


## 全自动卷式甜筒烘烤机

Full-automatic sugar rolled cone baking machine



型号说明 Model explanation

TH75 × 2-30A

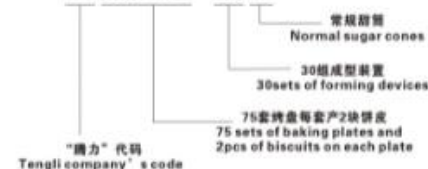

### “A”型常规甜筒主要机型及相关参数

Main models and the related parameters of "A" type normal cones

型号 Model	机器尺寸(m) Machine measurement	烤盘尺寸 Baking plate size(mm)	主机电动机 Drive motor	卷机电动机 Rolling system motor	鼓风机 Air blower	液化气使用量 Gas consumption (kg/h)	时产甜筒(只) Producing capacity(pcs/h)	角度 Angle ∠	适合生产甜筒长度L Suitable for cone length	总重量 Total weight (kg)
TH75 × 2-30A	12.2 × 2.2 × 1.75	240 × 280	380V 1.5KW	380V 0.2KW	380V 2.2KW	9-13	7500-8000	14°-34°	≤120MM	7200
	13.5 × 2.2 × 1.75	240 × 320			380V 2.2KW	10-14	7000-7500		≤140MM	8000
TH61 × 2-24A	9.9 × 2.2 × 1.75	240 × 280			380V 1.6KW	7-10	6500-7000		≤120MM	6000
	10.9 × 2.2 × 1.75	240 × 320			380V 1.6KW	8-11	6000-6500		≤140MM	6500
TH53 × 2-20A	8.5 × 2.2 × 1.75	240 × 280			380V 1.6KW	6-9	5500-6000		≤120MM	5200
	9.4 × 2.2 × 1.75	240 × 320			380V 1.6KW	6-10	5000-5500		≤140MM	5800
TH45 × 2-16A	7.2 × 2.2 × 1.75	240 × 280			380V 1.3KW	5-8	4500-5000		≤120MM	4800
	7.9 × 2.2 × 1.75	240 × 320			380V 1.3KW	6-8	4000-4500		≤140MM	5200
TH37 × 2-16A	6.0 × 2.2 × 1.75	240 × 280			380V 1.3KW	5-6	3500-4000		≤120MM	4000
	6.6 × 2.2 × 1.75	240 × 320			380V 1.3KW	5-7	3000-3500		≤140MM	4500

时产甜筒：需要根据配料质量、甜筒重量及烤盘温度来确定。

Production capacity: It depends on the batter quality, cone weight and temperature of baking plates.



Model	Wymiary urządzenia (m) dł. x szer. x wys.	Wymiar płyty (mm)	Napęd silnika	Napęd mechanizmu zwijającego	Nawiew powietrza	Zużycie gazu (kg/h)	Wydajność ilość sztuk/godzinę	Kąt	Odpowiednie dla długości rożków	Waga całkowita (kg)
TH75x2-30A	12.2x2.2x1.75	240x280	380V 1.5 kW	380V 0.2 kW	380 V 2.2 kW	9-13	7500-8000	14° - 34°	≤ L 120 mm	7200
	13.5x2.2x1.75	240x320			380 V 2.2 kW	10-14	7000-7500		≤ L 140 mm	8000
TH61x2-24A	9.9x2.2x1.75	240x280			380 V 1.6 kW	7-10	6500-7000		≤ L 120 mm	6000
	10.9x2.2x1.75	240x320			380 V 1.6 kW	8-11	6000-6500		≤ L 140 mm	6500
TH53x2-20A	8.5x2.2x1.75	240x280			380 V 1.6 kW	6-9	5500-6000		≤ L 120 mm	5200
	9.4x2.2x1.75	240x320			380 V 1.6 kW	6-10	5000-5500		≤ L 140 mm	5800
TH45x2-16A	7.2x2.2x1.75	240x280			380 V 1.3 kW	5-8	4500-5000		≤ L 120 mm	4800
	7.9x2.2x1.75	240x320			380 V 1.3 kW	6-8	4000-4500		≤ L 140 mm	5200
TH37x2-16A	6.0x2.2x1.75	240x280			380 V 1.3 kW	5-6	3500-4000		≤ L 120 mm	4000
	6.6x2.2x1.75	240x320			380 V 1.3 kW	5-7	3000-3500		≤ L 140 mm	4500

### TH75x2-30A

TH: kod urządzenia

75x2: ilość płyt wypiekowych + ilość wafli na płycie

30: ilość formatek

A: typ urządzenia do rożków do 155 mm